

Maintenance data

Maintenance data

 Check standard value

I t e m		Maintenance data
Brake pedal	Space mm ..tromping.. Ticara	1. 6
	300N(30kgf) with alcove slab when play mm (state without negative pressure) depressing it(state of engine ON)	Riyadh ram brake installation car of Riyadiscbraki
		installation car 2.0L car and 1.8L car of 1.8L car
Parking brake	Operation power 300N(30kgf) of stepping furnace notch *	95 or more is 90 or more.
V belt	Amount of bend	7. 10 Non-adjustment type

- The notch is moderation (sound "Catitsu") when the parking brake is put.

- Contents
- Warning
- Basic controls, operation
- Driving Handling device
- The Handling indoor equipment
- Good Safety of To theory, controls and equipment
- How to attention associate aiming car
- Maintenance
- Myriad One/D
- Index

Wattage of lamp

I t e m		Maintenance data
Lamp	Number of W (watt)	<p>Headlamp</p> <p>Discharge headlamp installation car</p> <ul style="list-style-type: none"> - 60W of high beam (valve type: H B 3) - 35W of low beam (valve type: D 2 S) <p>Halogen headlamp installation car</p> <ul style="list-style-type: none"> - 60W of high beam (valve type: H B 3) - Reception desk direction of 5W of front position light of 51W of reception desk fog lamp * of 55W of low beam (Valve type: H11) instruction light, side direction of 21W of emergency blinking light . . . instruction light, and 5W of emergency blinking light . . . Riya direction of 5W of number-plate light instruction light and tail light braking 21W of emergency blinking light light/. LED * High-mount stoplamp LED * Down of ceiling LED of 16W of retreat light light LED * Reception desk personal lamp of 8W of interior light <ul style="list-style-type: none"> - 10W of Moon roof installation car - 8W five W of luggage room lamp * except Moon roof installation car

- LED is abbreviation of Light Emitting Diodes (light emitting diode), and the semiconductor light emission element.

Amount and kind of cooling water and oils and fats

I t e m		Capacity L(reference value)	Designated stock	
Cooling water	2.0L	6.7	Pure Toyota super-long life coolant - Frozen guarantee temperature density 50%-35.	
	car 1.8L	FF car		6.9
		4WD car		6.5
Automatic transaxle Froude(FF car)	car	8.4	Toyota is pure. CVT Froude TC Toyota	
	2.0L car	6.9	is pure. Auto Froude type T-	
Automatic transaxle Froude transfer oil(4WD car)	1.8L car transaxle	6.9		
	transfer	0.9	Toyota is pure. Haipoidogiyaoil SX (API GL 5 and SAE85W 90)	
Riyadifarenshaloil(4WD car)		0.5	pure gear oil supermarket (API GL 5 and SAE75W 90) Toyota Toyota	
Power steering Froude (2.0L car <Z grade > and 4WD car)		0.8	is pure. Power steering Froude Toyota	
Brake Froude		----	is pure. Brake Froude 2500H	

I t e m		Capacity L(reference value)		Specified oils and fats
		Amount of filling when only oil is exchanged	Amount of filling when oil and oil filter are exchanged	
Engine oil	1AZ - FSE	4.0	4.2	Toyota pure motor oil 蘆SM5W. 30(API SM, EC / ILSAC GF-4, SAE 5W -30) 蘆SM10W. 30(API SM, EC / ILSAC GF-4, SAE 10W -30) 蘆SL5W. 20(API S L , E C SAE 5W -20) 蘆SL10W. 30(API S L , E C SAE 10W -30)
	1ZZ - FE	4.0	4.2	

Contents



Warning


Basic
services, operationDriving
Handling
deviceThe
Handling indoor
equipmentGood. Safety
of
To
theory, vehicle
and
equipmentHow
to attentionAssociate driving
car

Maintenance

Myriad
One(D)七
m

Index

- Specified engine oil




API mark



ILSAC CERTIFICATION mark

We will encourage API standard SM/EC, SL/EC or the ILSAC standard passing oil. ILSAC CERTIFICATION (Ilsaccsartification) mark is attached to the can of the ILSAC standard passing oil. -

Use the one of a suitable viscosity for the outside temperature based on the following table.

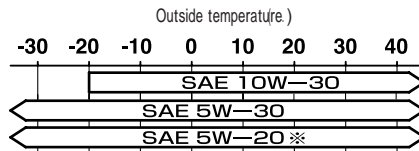

- 5W20 is the most excellent oil in the conserve fuel cost.

Capacity of washer tank

I t e m		Maintenance data
Washer tank	Capacity L(reference value)	3.5

Amount and kind of fuel

I t e m		Maintenance data	
Fuel (fuel tank)	Capacity [L] (reference value)	Nonlead regular gasoline	60



Specification of tire wheel

Size of tire		Item	Size of wheel		
			Size of rim		P.C.D. Amount of offset
			Steel wheel	Aluminum foil	
Standard Spare	195/65R15 91S (Exclude Z grade.)	15. 6JJ	15. 6JJ	100mm . 5(hole)	45mm
	215/50R17 91V (Z grade)		/		
tire for tire emergency	T125/70D16 96M (FF cars except 2.0L car <Z grade >)	16. 4T	/		42mm
	T135/80D16 101M (2.0L car <Z grade > and 4WD car)	16. 4T	/		

Tyre type			Air pressure when tire is cold [kPa{kg/cm ² }]
Standard	tire FF		220{2.2}
		car 215/50R17 91V	
	4WD car		210{2.1}
Spare tire for emergency			420{4.2}



Name	Model	Engine	Drive system	Grade
Wish	ANE11W	1AZ-FSE (2.0L gasoline)	FF (front-wheel drive)	Z
	ANE10G			G
	ZNE10G	1ZZ-FE (1.8L gasoline)	4WD (four wheel drive)	X
	ZNE14G			

MEMO

Contents



Warning

Basic
services, operation

Driving
Handling
device

The
Handling indoor
equipment

Good Safety
of
To
theory, practice
and
equipment

How
to
attention
operate driving
car

Maintenance

Myriad
OneID
C
m

Index

MEMO
